


Micro Relays 12 V
0 332 201 107

Change over	Normal close	Normal open
✓		

Mounting bracket	Resistor	Diode	Life durability	Current[1)]	Voltage	Number of Pins	Housing type	Temperature range	Degree of protection housing	Degree of protection connection
X	✓	X	100.000	30/10 A at 23 °C	12 V	5	Plastic housing	-40… +100°C	IP5K4	IP20

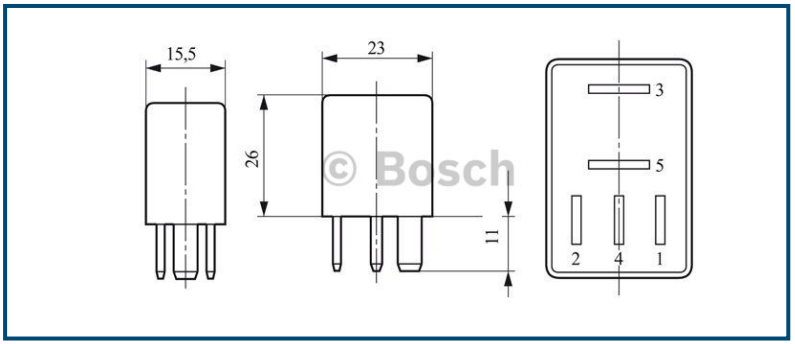

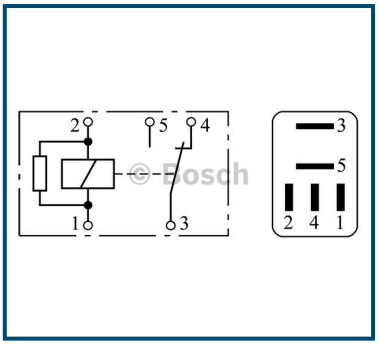

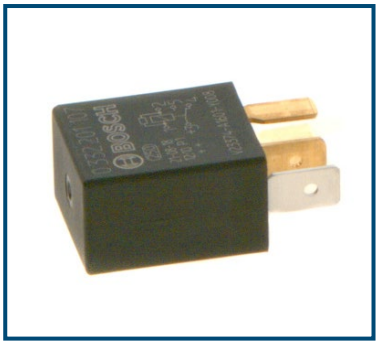

[1)] The current carrying capacity of the relay is subject to derating at elevated ambient temperatures.

Back to general overview

© Robert Bosch GmbH 2024. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.