




## EBM05FU30

|                                       |                            |                       |
|---------------------------------------|----------------------------|-----------------------|
| Operating Current                     |                            | 10A                   |
| Product                               |                            | Multipole             |
| Type                                  |                            | Extension Type Plug   |
| Contact                               |                            | 5 Poles               |
| Usage Category                        |                            | AC15                  |
| Mechanical Life                       | Min Qty                    | ≥ 500                 |
| Electrical Life                       | Min Qty                    | ≥ 100                 |
| Operating Frequency                   | On-Off/Hour                | Mech.240 Elec.120     |
| Insulation Voltage                    | Ui                         | 690V                  |
| Impulse Withstand Voltage             | Uimp                       | 6 kV                  |
| Dielectric Strength (Body-Contact)    |                            | 1890V AC              |
| Dielectric Strength (Contact-Contact) |                            | 3000V AC              |
| Isolation Resistance                  |                            | 10 MΩ Min. (500 V DC) |
| Operating Temperature                 |                            | -40 / +125 °C         |
| Pollution Degree                      |                            | 1                     |
| Protection Degree                     |                            | IP65                  |
| Body Material                         |                            | Metal                 |
| Production Time                       |                            | 31.12.1899 00:00:00   |
| Serial                                |                            | EBM Series            |
| Entry                                 |                            | Top Entry             |
| Specifications                        | Wide product variety       |                       |
|                                       | IP65 in closed position    |                       |
|                                       | Universal inserts          |                       |
|                                       | Easy cabling               |                       |
|                                       | Different locking types    |                       |
|                                       | Powdercoated metal housing |                       |
| Standards / Certificates              | TS EN 61984                |                       |



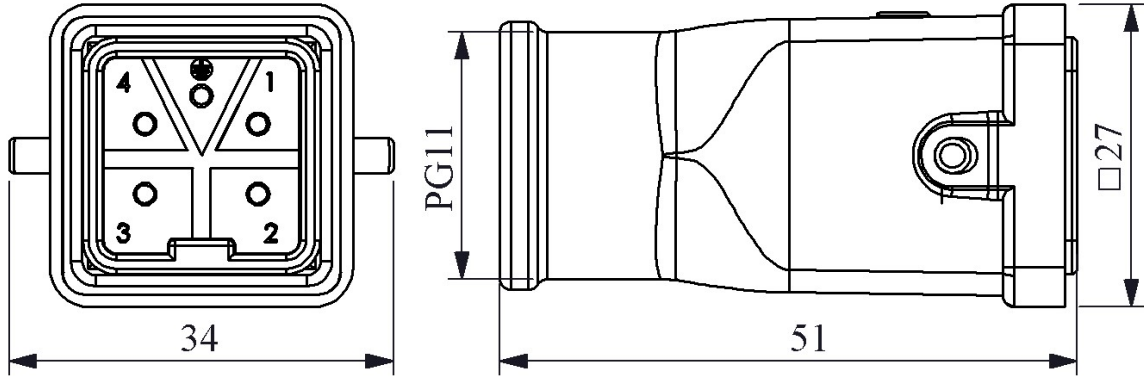

Kontak Sayısı: 4P+E