

FP-108-B/DC


92 x 92 x 25.4 mm

DESIGN FEATURES


- * **Bearing System:**
Sleeve bearing & ball bearing
- * **Impeller:**
Plastic with fiber glass filed UL 94V-0
- * **Housing:**
Plastic with fiber glass filed UL 94V-0
- * **Motor:**
Brushless DC
- * **Connecting:**
Wire leads
- * **Speed:**
S-1 high speed type
S-2 medium speed type
S-3 low speed type
- * Available FG Type for Speed Sensor Signal
- * Available RD Type for Rotor Locked Alarm Signal



Dimensions: mm

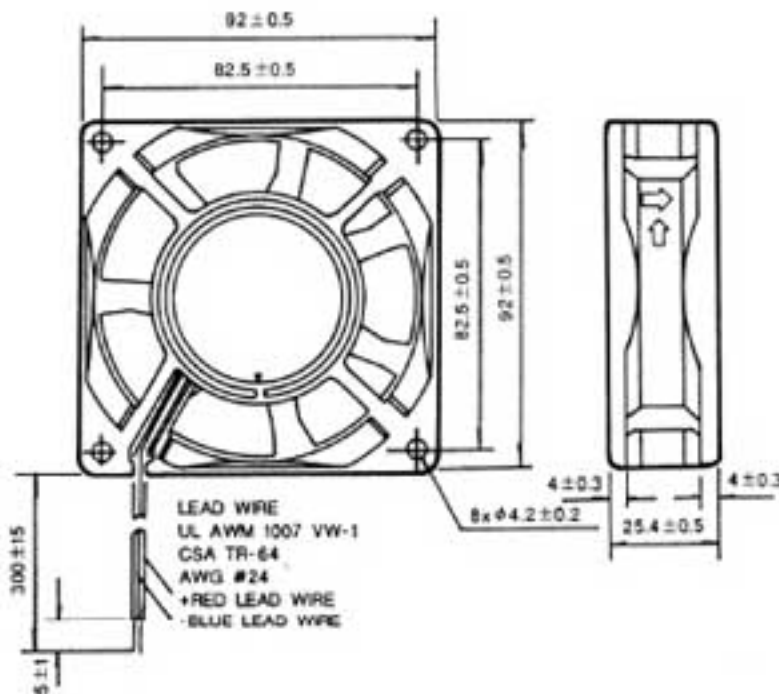

Performance

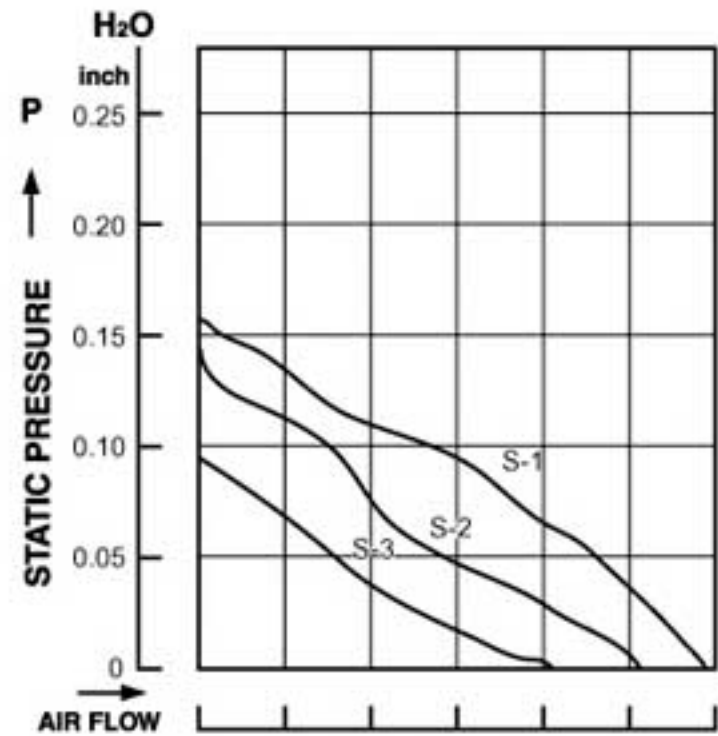

Specifications

MODEL NO.	VOLTAGE (VDC)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
FP-108B/DC (S-1)	12	59.0	1.67	0.32	3.84	3000	0.16	36
	24	59.0	1.67	0.18	4.32	3000	0.16	36
FP-108B/DC (S-2)	12	50.5	1.43	0.20	2.40	2500	0.14	34
	24	50.5	1.43	0.14	3.36	2500	0.14	34
FP-108B/DC (S-3)	12	41.5	1.18	0.16	1.92	2200	0.09	26
	24	41.5	1.18	0.10	2.40	2200	0.09	26