


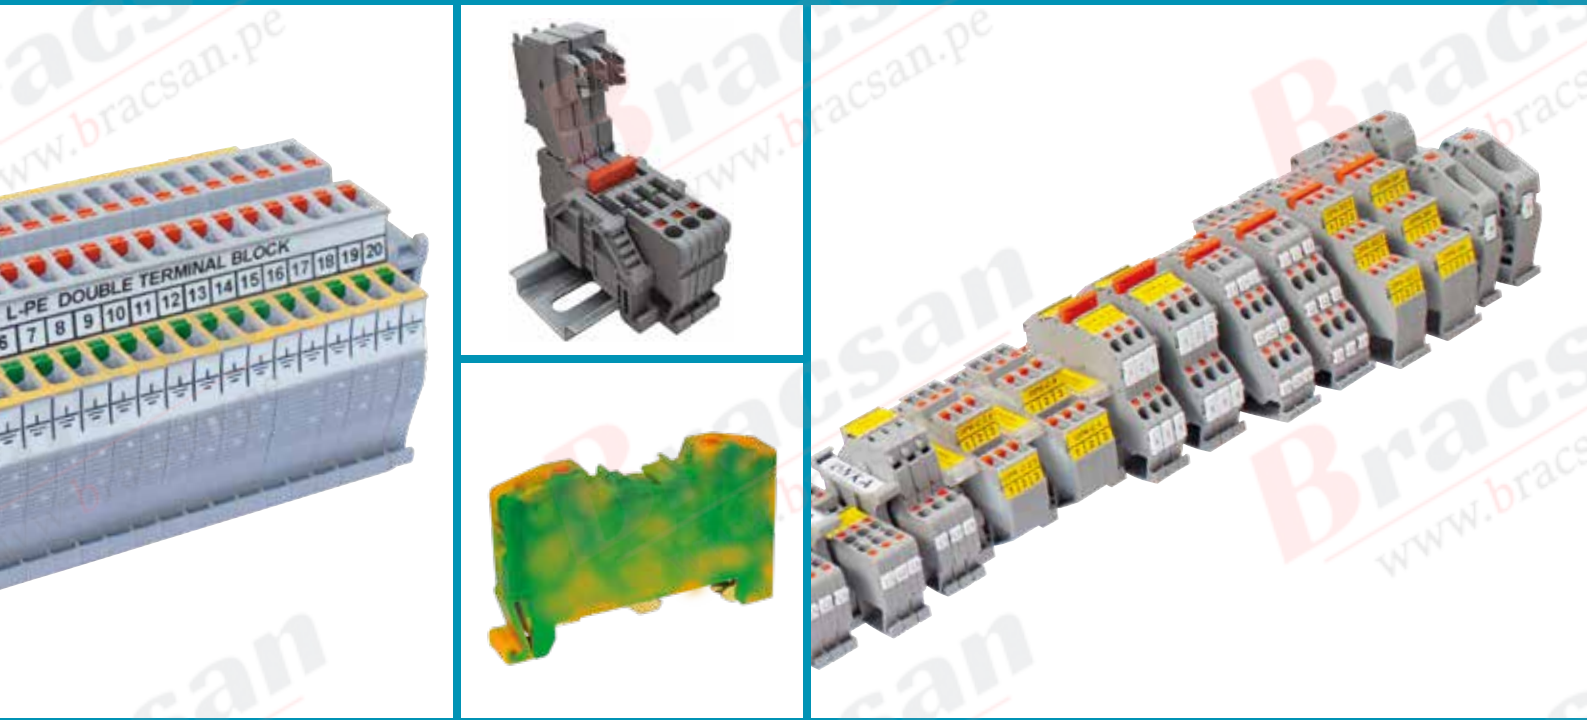

OPK SERIES PUSH-IN CONNECTION RAIL TERMINAL BLOCKS


Technical Features ;

- Push-in System
- Does not require final plate (Both sides are closed), provides cost saving and better isolation
- Symmetrical (Mountable to rail on both directions)
- Lower cable thrust
- Time and cost saving
- Reducing transmission, zero contact by means of orange buttons
- Springs are stainless steel
- Opportunity to assemble cable with ferrule of 0,50 mm² to 35 mm² without any hand tool requirement
- Labelling system appropriate for strap marking
- Double sided bridging opportunity
- Isolated comb bridge

Range of Products;


- OPK Series standard terminal blocks
- OPK Series earth rail terminal blocks
- OPK Series double rail terminal blocks
- OPK Series triple rail terminal blocks
- OPK Series 1 in 2 out terminal blocks
- OPK Series 2 in 2 out terminal blocks
- OPK Series 2 in 2 out knife disconnect terminal blocks
- OPK Series fused terminal blocks
- MRK and OPK Series stoppers
- OPK Series separation plate
- OPK Series Cross connections

OPK SERIES





The roll labelling system can be used in all of 2,5 - 4 - 6 and 10 mm² push-in terminal blocks

It can be tested by touching the test probes from two different points over the terminal blocks without ejecting the fuse



It can be easily measured within the holes

OPK fuse terminal block terminals have a nest in order to keep an extra glass fuse

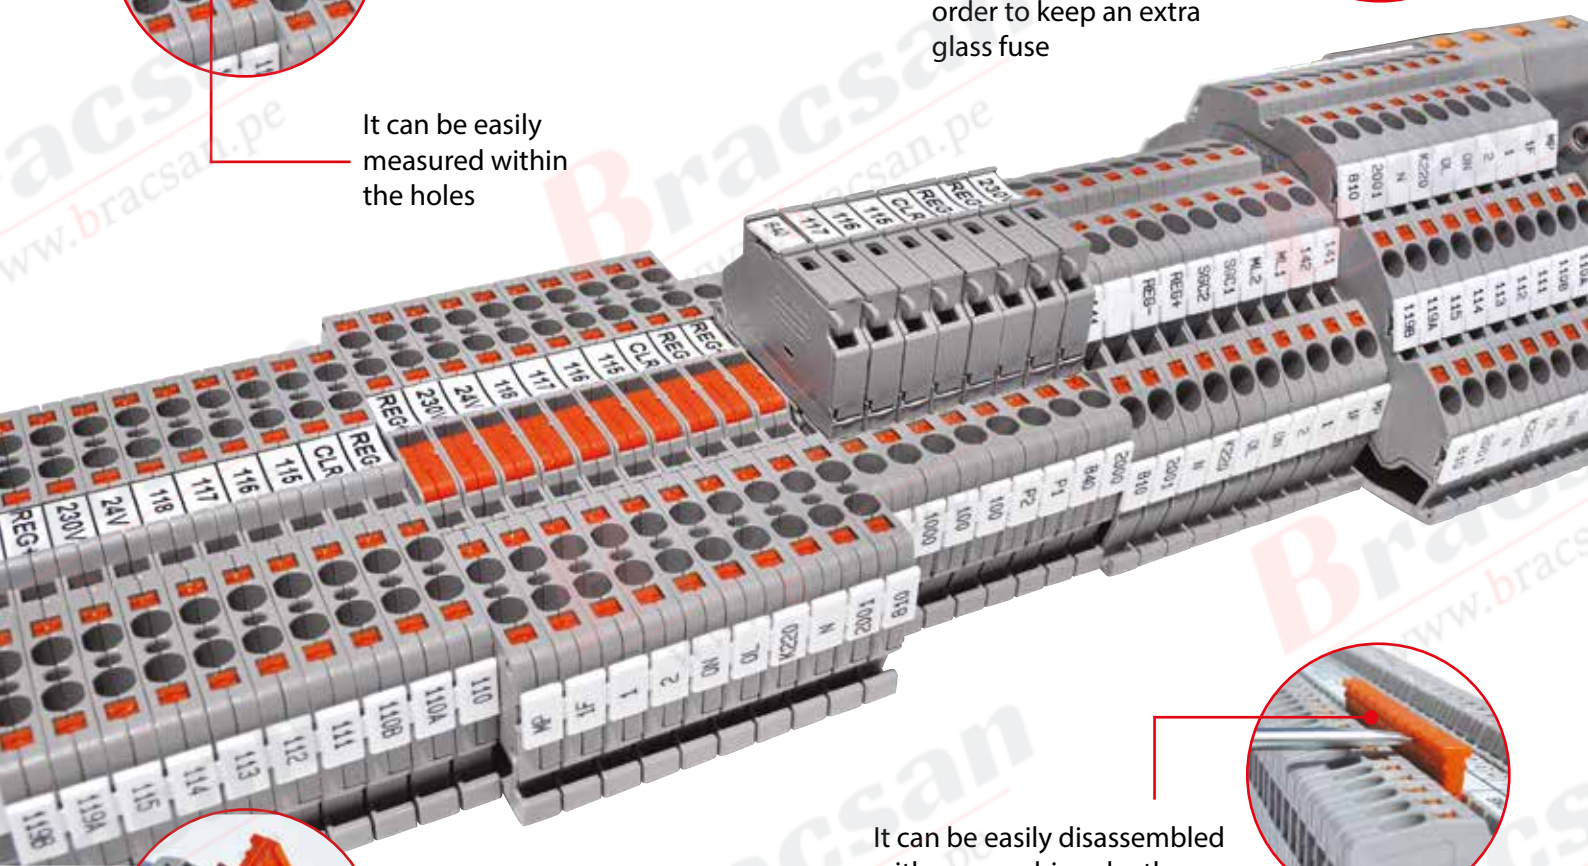

Continuous and safe contact from four points due to the diagonal structure of the pins

It can be easily disassembled with a screwdriver, by the help of the notch over the bridge



Due to the channels on the comb bridge, it gives the chance to be cut from the center of the pin gap.

This feature is valid with 10 and 20 pin bridges





OPK SERIES PUSH-IN CONNECTION TERMINAL BLOCKS



OPK 1,5

New Code: 1020002

Old Code: 1592

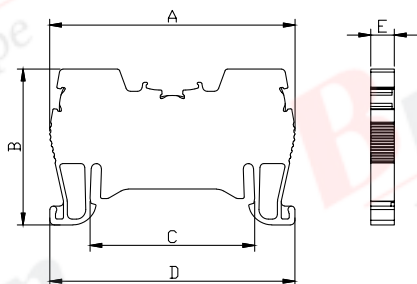

* MONOBLOCK *

Dimension (mm)	A	B	C	D	E
	52,0	33,0	34,5	51,9	5,0

MATERIAL

Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE
Voltage	750 V
Current	17,5 A
Section	1,5 mm ²
Norm	EN-60947-7-1

COLOURS

COLOUR	V2 New Code	V2 Old Code	V0 New Code	V0 Old Code	Pcs.
GREY	1020002	1592	1020074	0532	100
CREAM	1020003	1593	1020075	0533	100
BLACK	1020004	1594	1020076	0534	100
BLUE	1020005	1595	1020077	0535	100
BROWN	1020006	1596	1020078	0536	100
RED	1020007	1597	1020079	0537	100
YELLOW	1020008	1598	1020080	0538	100
GREEN	1020009	1599	1020081	0539	100

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060101	1920	1,5 / 2	100	Pg. 67
	1060102	1921	1,5 / 3	100	
	1060103	1922	1,5 / 4	100	
	1060104	1923	1,5 / 10	30	
	1060105	1924	1,5 / 20	20	
Stopper	1060002	1202		100	Pg. 65-66
	1060005	1212		100	
	1060014	1222		100	
Group Sticker	1060024	1232		100	

MARKING



	New Code	Old Code	See Page
Dekafix	1060198	5443	Pg. 181 - 185
	1060194	4442	
	-	9540	
	-	9770	
Roll Label	-	8943-S11	Pg. 176



OPK 2,5

New Code: 1020013

Old Code: 1502

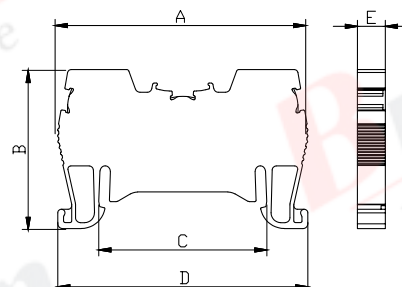

* MONOBLOCK *

Dimension (mm)	A	B	C	D	E
	52,0	33,0	34,5	51,9	5,8

MATERIAL

Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	24 A	20 A
Section	2,5 mm ²	12 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

COLOUR	V2 New Code	V2 Old Code	V0 New Code	V0 Old Code	Pcs.
GREY	1020013	1502	1020083	0922	100
CREAM	1020014	1503			100
BLACK	1020015	1504	1020084	0924	100
BLUE	1020016	1505	1020085	0925	100
BROWN	1020017	1506	1020086	0926	100
RED	1020018	1507	1020087	0927	100
YELLOW	1020019	1508			100
GREEN	1020020	1509	1020088	0929	100

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060106	1925	2,5 / 2	100	Pg. 67
	1060107	1926	2,5 / 3	100	
	1060108	1927	2,5 / 4	75	
	1060109	1928	2,5 / 10	30	
	1060110	1929	2,5 / 20	20	
Stopper	1060002	1202		100	Pg. 65-66
	1060005	1212		100	
	1060014	1222		100	
Group Sticker	1060024	1232		100	

MARKING

	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 181 - 185
	1060194	4442	
	-	9540	
	-	9770	
Roll Label	-	8943-S11	Pg. 176



OPK SERIES PUSH-IN CONNECTION TERMINAL BLOCKS



OPK 2,5 SLIM

New Code: 1020814

Old Code: 1810

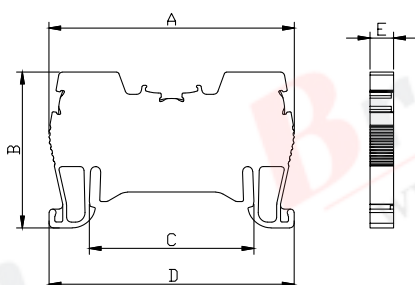

* MONOBLOCK *

Dimension (mm)	A	B	C	D	E
	52,0	33,0	34,5	51,9	5,0

MATERIAL

Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE
Voltage	750 V
Current	17,5 A
Section	2,5 mm ²
Norm	EN-60947-7-1

COLOURS

COLOUR	V2 New Code	V0 New Code	Pcs.
GREY	1020814	1020825	100
CREAM	1020815	1020826	100
BLACK	1020816	1020827	100
BLUE	1020817	1020828	100
BROWN	1020818	1020829	100
RED	1020819	1020830	100
YELLOW	1020820	1020831	100
GREEN	1020821	1020832	100

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060101	1920	1,5 / 2	100	Pg. 67
	1060102	1921	1,5 / 3	100	
	1060103	1922	1,5 / 4	100	
	1060104	1923	1,5 / 10	30	
	1060105	1924	1,5 / 20	20	
Stopper	1060002	1202		100	Pg. 65-66
	1060005	1212		100	
	1060014	1222		100	
Group Sticker	1060024	1232		100	

MARKING



	New Code	Old Code	See Page
Dekafix	1060198	5443	Pg. 181 - 185
	1060194	4442	
	-	9540	
	-	9770	
Roll Label	-	8943-S11	Pg. 176



OPK 4

New Code: 1020024

Old Code: 1512

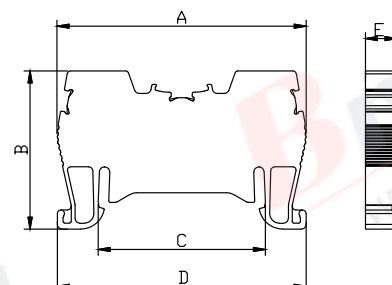

* MONOBLOCK *

Dimension (mm)	A	B	C	D	E
	52,0	33,0	34,5	51,9	6,6

MATERIAL

Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	32 A	26 A
Section	4,0 mm ²	10 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

COLOUR	V2 New Code	V2 Old Code	V0 New Code	V0 Old Code	Pcs.
GREY	1020024	1512	1020090	0932	100
CREAM	1020025	1513			100
BLACK	1020026	1514	1020091	0934	100
BLUE	1020027	1515	1020092	0935	100
BROWN	1020028	1516	1020093	0936	100
RED	1020029	1517	1020094	0937	100
YELLOW	1020030	1518			100
GREEN	1020031	1519	1020095	0939	100

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060111	1930	4 / 2	100	Pg. 67
	1060112	1931	4 / 3	100	
	1060113	1932	4 / 4	50	
	1060114	1933	4 / 10	30	
	1060115	1934	4 / 20	20	
Stopper	1060002	1202		100	Pg. 65-66
	1060005	1212		100	
	1060014	1222		100	
Group Sticker	1060024	1232		100	

MARKING

	New Code	Old Code	See Page
Dekafix	1060190	4390	Pg. 181 - 185
	1060194	4442	
	-	9540	
	-	9770	
Roll Label	-	8943-S11	Pg. 176



OPK SERIES PUSH-IN CONNECTION TERMINAL BLOCKS



OPK 6

New Code: 1020034

Old Code: 1522

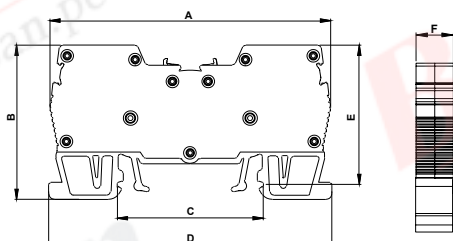

Dimension (mm)	A	B	C	D	E	F
	66,3	36,4	34,5	66,8	32,9	8,1

MATERIAL

Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	12 mm

DATA	TSE / CE
Voltage	750 V
Current	41 A
Section	6,0 mm ²
Norm	EN-60947-7-1

COLOURS

COLOUR	V2 New Code	V2 Old Code	V0 New Code	V0 Old Code	Pcs.
GREY	1020034	1522	1020096	0942	100
CREAM	1020035	1523			100
BLACK	1020036	1524			100
BLUE	1020037	1525	1020550		100
BROWN	1020038	1526			100
RED	1020039	1527			100
YELLOW	1020040	1528			100
GREEN	1020041	1529	1020551		100

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060126	1945	6 / 2	100	Pg. 67
	1060127	1946	6 / 3	50	
	1060128	1947	6 / 4	50	
	1060129	1948	6 / 10	15	
	1060130	1949	6 / 20	10	
Stopper	1060002	1202		100	Pg. 65-66
	1060005	1212		100	
	1060014	1222		100	
Group Sticker	1060024	1232		100	

MARKING



	New Code	Old Code	See Page
Dekafix	1060188	2630	Pg. 181 - 185
	1060194	4442	
	-	9540	
	-	9770	
Roll Label	-	8943-S11	Pg. 176



OPK 10

New Code: 1020044

Old Code: 1532

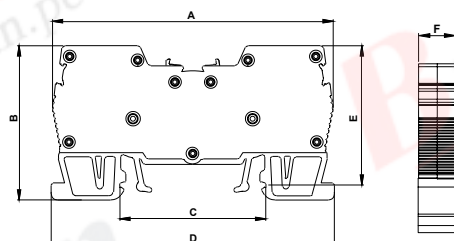

Dimension (mm)	A	B	C	D	E	F
	66,3	36,4	34,5	66,8	32,9	10

MATERIAL

Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	12 mm

DATA	TSE / CE
Voltage	750 V
Current	57 A
Section	10 mm ²
Norm	EN-60947-7-1

COLOURS

COLOUR	V2 New Code	V2 Old Code	V0 New Code	V0 Old Code	Pcs.
GREY	1020044	1532	1020097	0952	100
CREAM	1020045	1533			100
BLACK	1020046	1534			100
BLUE	1020047	1535			100
BROWN	1020048	1536			100
RED	1020049	1537			100
YELLOW	1020050	1538			100
GREEN	1020051	1539			100

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060131	1950	10 / 2	100	Pg. 67
	1060132	1951	10 / 3	50	
	1060133	1952	10 / 4	50	
	1060134	1953	10 / 10	15	
	1060135	1954	10 / 20	10	
Stopper	1060002	1202		100	Pg. 65-66
	1060005	1212		100	
	1060014	1222		100	
Group Sticker	1060024	1232		100	

MARKING

	New Code	Old Code	See Page
Dekafix	1060188	2630	Pg. 181 - 185
	1060194	4442	
	-	9540	
	-	9770	
Roll Label	-	8943-S11	Pg. 176



OPK SERIES PUSH-IN CONNECTION TERMINAL BLOCKS



OPK 16

New Code: 1020054

Old Code: 1542

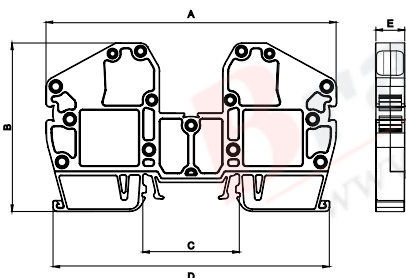

Dimension (mm)	A	B	C	D	E
	103,0	60,0	34,5	98,0	10,7
MATERIAL					
Body	PA6.6		Spring	Stainless Steel	
Bridge	Copper		Temp.	-40 °C, +140 °C	
Orange Button	PA6.6		Cable Strip L.	22 mm	
DATA	TSE / CE				
Voltage	750 V				
Current	76 A				
Section	16 mm²				
Norm	EN-60947-7-1				

COLOURS					
	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1020054	1542	1020098	0962	30
CREAM	1020055	1543			30
BLACK	1020056	1544			30
BLUE	1020057	1545			30
BROWN	1020058	1546			30
RED	1020059	1547			30
YELLOW	1020060	1548			30
GREEN	1020061	1549			30

ACCESSORIES					
Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060136	1955	16 / 2	10	Pg. 67
	1060137	1956	16 / 3	10	
	1060138	1957	16 / 4	10	
	1060139	1958	16 / 10	10	
Stopper	1060002	1202		100	Pg. 65-66
	1060005	1212		100	
	1060014	1222		100	
Group Sticker	1060024	1232		100	



MARKING			
	New Code	Old Code	See Page
Dekafix	1060194	4442	Pg. 181 - 185
	-	9540	
	-	9770	



OPK 35

New Code: 1020064

Old Code: 1552

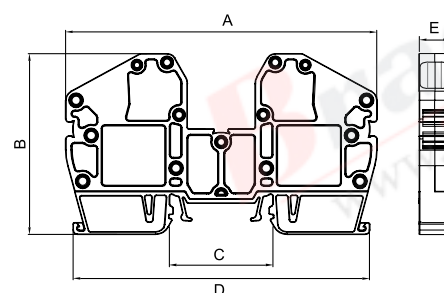

Dimension (mm)	A	B	C	D	E
	103,0	60,0	34,5	98,0	15,2
MATERIAL					
Body	PA6.6	Spring	Stainless Steel		
Bridge	Copper	Temp.	-40 °C, +140 °C		
Orange Button	PA6.6	Cable Strip L.	22 mm		
DATA	TSE / CE				
Voltage	750 V				
Current	125 A				
Section	35 mm ²				
Norm	EN-60947-7-1				

COLOURS					
	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1020064	1552	1020099	0972	20
CREAM	1020065	1553			20
BLACK	1020066	1554			20
BLUE	1020067	1555			20
BROWN	1020068	1556			20
RED	1020069	1557			20
YELLOW	1020070	1558			20
GREEN	1020071	1559			20

ACCESSORIES					
Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060140	1959	35 / 2	10	Pg. 67
	1060141	1960	35 / 3	10	
	1060142	1961	35 / 4	10	
	1060143	1962	35 / 10	10	
Stopper	1060002	1202		100	Pg. 65-66
	1060005	1212		100	
	1060014	1222		100	
Group Sticker	1060024	1232		100	

MARKING			
	New Code	Old Code	See Page
Dekafix	1060194	4442	Pg. 181 - 185
	-	9540	
	-	9770	