

8032-B

80x80x32MM

General Specifications

Material	Expected Life	Temperature Range	Safety Standards	DC Fan Specials	IP Class
Frame: Plastic (UL94V-0) Impeller: Plastic (UL94V-0) Lead Wire: UL1007AWG#24 or Equivalent (+) Red, (-) Black	Ball Bearing 70,000hrs (40°C)	Operating Temperature -10°C~70°C (Non-condensing) Storage Temperature -40°C~70°C (Non-condensing)	UL, TUV, CE	RD, FG, PWM	IP56




Specifications

Model	#Bearing Type	Rated Voltage	Operating Voltage	Current	Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	B	VDC	VDC	Amp	Watt	RPM	CFM	m³/min	Inch-H ₂ O	Pa	dB-A	g
DA08032B12U	B	12	7.0~13.8	1.50	18.00	6500	79.72	2.26	0.89	220.50	56.9	95.0
DA08032B12H	B	12	7.0~13.8	0.90	10.80	5500	67.16	1.90	0.63	156.14	52.8	95.0
DA08032B12M	B	12	7.0~13.8	0.60	7.20	4500	54.27	1.54	0.43	107.11	46.8	95.0
DA08032B12L	B	12	7.0~13.8	0.40	4.80	3500	41.85	1.19	0.27	66.82	39.5	95.0
DA08032B24U	B	24	14.0~27.6	0.80	19.20	6500	79.72	2.26	0.89	220.50	56.9	95.0
DA08032B24H	B	24	14.0~27.6	0.50	12.00	5500	67.16	1.90	0.63	156.14	52.8	95.0
DA08032B24M	B	24	14.0~27.6	0.30	7.20	4500	54.27	1.54	0.43	107.11	46.8	95.0
DA08032B24L	B	24	14.0~27.6	0.20	4.80	3500	41.85	1.19	0.27	66.82	39.5	95.0
DA08032B48U	B	48	28.0~56.0	0.50	24.00	6500	79.72	2.26	0.89	220.50	56.9	95.0
DA08032B48H	B	48	28.0~56.0	0.30	14.40	5500	67.16	1.90	0.63	156.14	52.8	95.0
DA08032B48M	B	48	28.0~56.0	0.20	9.60	4500	54.27	1.54	0.43	107.11	46.8	95.0
DA08032B48L	B	48	28.0~56.0	0.10	4.80	3500	41.85	1.19	0.27	66.82	39.5	95.0

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

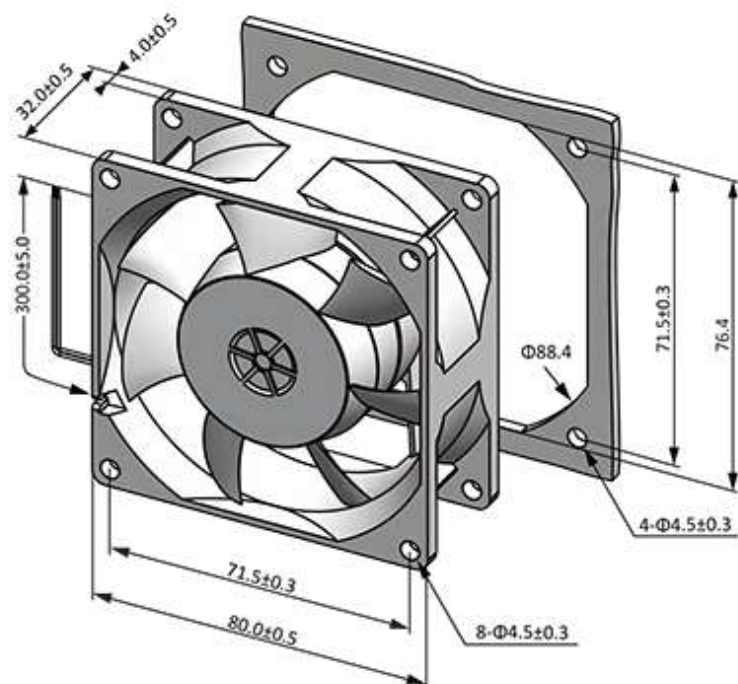

PQ Curve (At Rated Voltage)

