



| | | | |
|-------------------------------|--|------|------|
| UNIT 类型 | Axial fan motor 外转子轴流风机 | | |
| MOTOR 电机型式 | Three phase motor | | |
| MOTOR TYPE 电机型号 | YWF4D-300S-92/35-G | | |
| VOLTAGE 额定电压 (V) | △220 | Y380 | Y440 |
| FREQUENCY 频率 (Hz) | 60 | 60 | 60 |
| INPUT POWER 输入功率 (W) | 90 | 90 | 96 |
| CURRENT 电流 (A) | 0.35 | 0.20 | 0.18 |
| SPEED 转速 (r/min) | 1550 | 1550 | 1600 |
| AIR FLOW 20Pa 风量 (m³/h) | 2007 | 2007 | 2247 |
| NOISE 噪音 (dBA) | 61 | 61 | 61 |
| CAPACITOR 电容 (µF/450V) | - | | |
| ROTATION 旋转方向 | CW ,looking into the end-shield 顺时针, 从端盖端方向看 | | |
| INSULATION CLASS 绝缘等级 | F | | |
| MOTOR PROTECTION 电机保护 | Thermocontact 150±5°C 热保护器 | | |
| TEMPERATURE RISE 温升 | 75K max 运行温升不超过75K | | |
| TYPE OF PROTECTION 防护等级 | IP54 | | |
| OPERATING TYPE 工作定额 | S1 连续工作制 | | |
| AMBIENT TEMPERATURE 适用环境温度 | -30°C +60°C | | |
| BEARINGS 轴承型式 | Ball bearings 滚珠轴承 | | |
| MOUNTING TYPE 安装方式 | Horizontal or Vertical 垂直或水平安装 | | |
| ELECTRICAL CONNECTION 电源线 | Lead wire 1330UL 7G 0.50mm²+2G 0.30mm² , Length 100mm in terminal box connected 接线盒 (7芯0.5mm²+2芯0.3mm²线长100mm) | | |
| APPROVALS 认证标记 | CE | | |
| NET WEIGHT/GROSS WEIGHT 净重/毛重 | 3.4/4.0kg | | |
| PACKING 包装 | 34*34*18cm | | |


LABEL (铭牌):

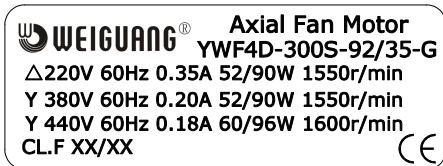

FLOW RATE CURVE (风量曲线):

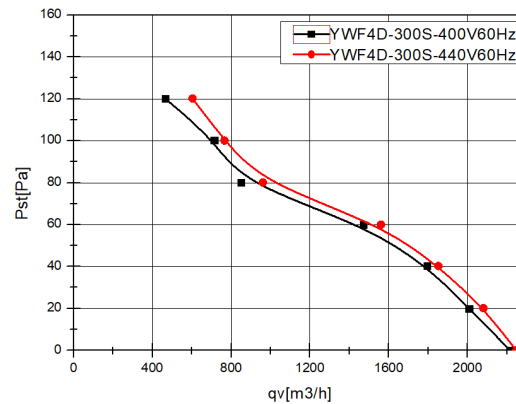

WIRING DIAGRAM (接线图):

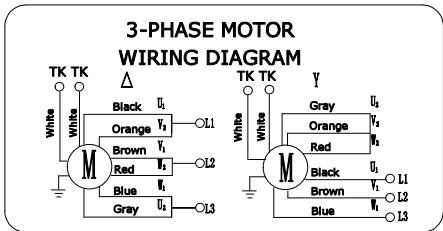

| | | | | | | | | | |
|------|-------------|----------|------|--|--|--|---------|------|--|
| REV. | DESCRIPTION | APPROVED | DATE | | | | SIGN | DATE | TITLE |
| | | | | | | | DRN. BY | | YWF4D-300S-92/35-G |
| | | | | | | | CHD. BY | | |
| | | | | | | | ENG. BY | | PROJECTION  |
| | | | | | | | APP. BY | | |