


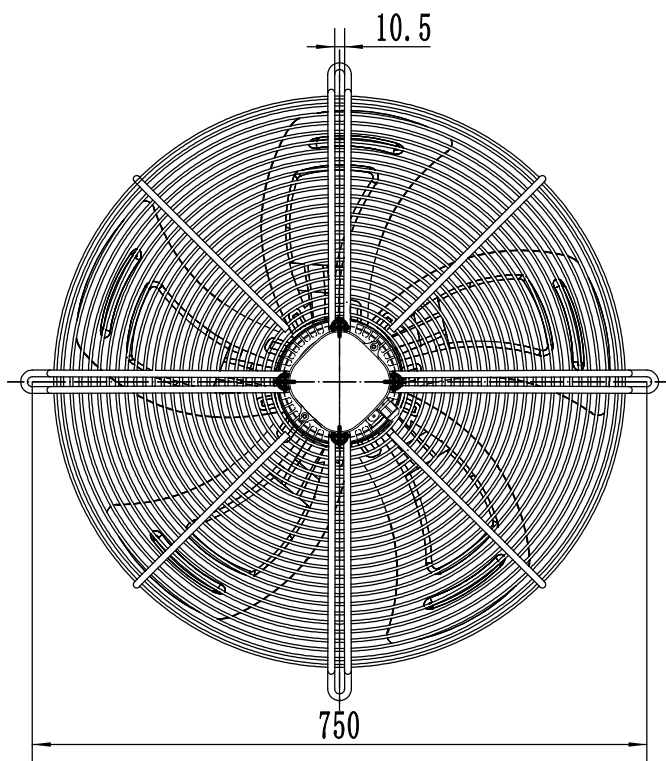


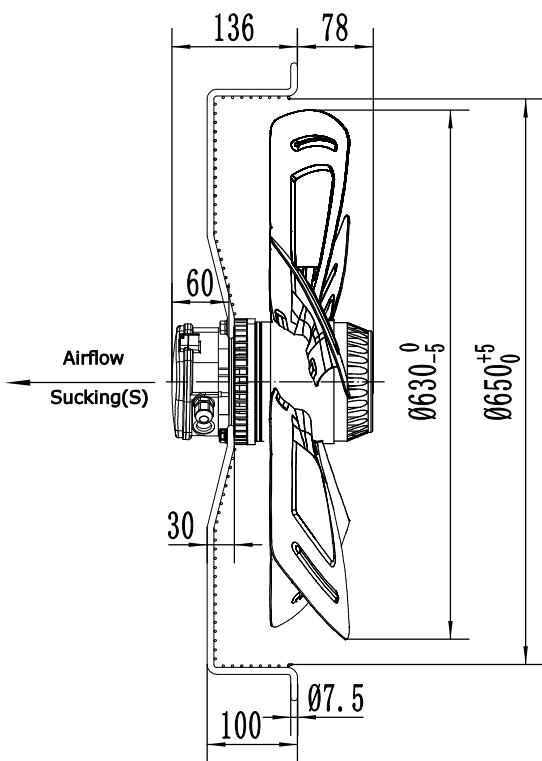


LABEL (铭牌):

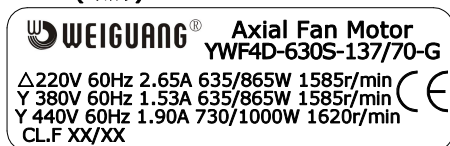

WIRING DIAGRAM (接线图):

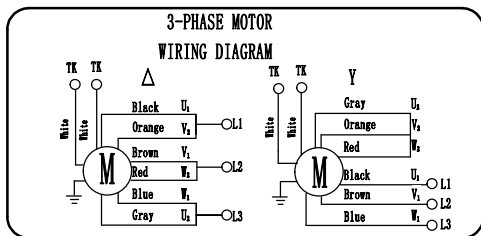

FLOW RATE CURVE (风量曲线):

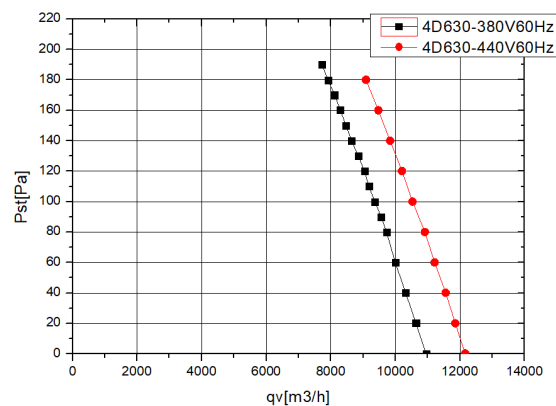

UNIT 类型	Axial fan motor		
MOTOR 电机型号	Three phases motor		
MOTOR TYPE 电机型号	YWF4D-630S-137/70-G		
VOLTAGE 额定电压 (V)	△220	Y380	Y440
FREQUENCY 频率 (Hz)	60	60	60
INPUT POWER 输入功率 (W)	865	865	1000
CURRENT 电流 (A)	2.65	1.53	1.90
SPEED 转速 (r/min)	1585	1585	1620
AIR FLOW 20Pa 风量 (m³/h)	10637	10637	11854
NOISE 噪音 (dBA)	76	76	77
CAPACITOR 电容 (μ F/450V)	-		
ROTATION 旋转方向	CW ,looking into the end-shield 顺时针, 从端盖端方向看		
INSULATION CLASS 绝缘等级	F		
MOTOR PROTECTION 电机保护	Thermocontact 150±5℃ 热保护器		
TEMPERATURE RISE 温升	75K max 运行温升不超过75K		
TYPE OF PROTECTION 防护等级	IP54		
OPERATING TYPE 工作定额	S1 连续工作制		
AMBIENT TEMPERATURE 适用环境温度	-30℃ +60℃		
BEARINGS 轴承型式	Ball bearings 滚珠轴承		
MOUNTING TYPE 安装方式	Horizontal or Vertical 垂直或水平安装		
ELECTRICAL CONNECTION 电源线	Lead wire 1330UL 7G 0.75mm²+2G 0.30mm² ,Length 100mm in terminal box connected 接线盒 (7芯0.75mm²+2芯0.30mm²线长100mm)		
APPROVALS 认证标记	CE		
NET WEIGHT/GROSS WEIGHT 净重/毛重	15.0/17.0kg		
PACKING 包装	67.0*67.0*24cm		

REV.	DESCRIPTION	APPROVED	DATE	DRN. BY	SIGN	DATE	TITLE
				CHD. BY			YWF4D-630S-137/70-G
				ENG. BY			PROJECTION
				APP. BY			A4 SCALE SHEET: of