

Sunmoon Battery

HPC1550

Hybrid Pulse Capacitor (HPC) 4.0V



• Eletrical Specification

Nominal Voltage	4.0V
Impedance	$\leq 50\text{m}\Omega$
Nominal Capacity	720AS(180mAh)@3.67V
After standard charging, 1C discharge to 2.75V at 25°C $\pm$ 3°C[C is the nominal capacity value under specified voltage]	1260AS(350mAh)@3.90V
	1368AS(380mAh)@4.00V
Max. Continuous Discharge Current	2000mA
Max. Pulse Discharge Current	5000mA
Discharge Cutoff Voltage	2.5V
Operating Temperature	-40°C ~ +85°C
Max. Energy	1.9Wh
Weight	$\leq 22\text{g}$

• Advantages

- Nominal voltage 4.0V, maximum charging voltage 4.0V, discharge cutoff voltage 2.5V
- High power discharge; Small in size and lightweight with excellent sealing performance and good applicability
- Parallel connection with Li/SOCl₂ to increase the energy output efficiency of Li/SOCl₂
- Parallel connection with Li/SOCl₂ to prevent the passivation[or voltage delay] of Li-SOCl₂

• Main Applications



Customer Satisfaction is the Purpose We Always Adhere to,
Continuous Improvement is the Direction We Always Pursue!


Sunmoon Battery

HPC1550



Hybrid Pulse Capacitor (HPC) 4.0V



Voltage VS Pulse Time

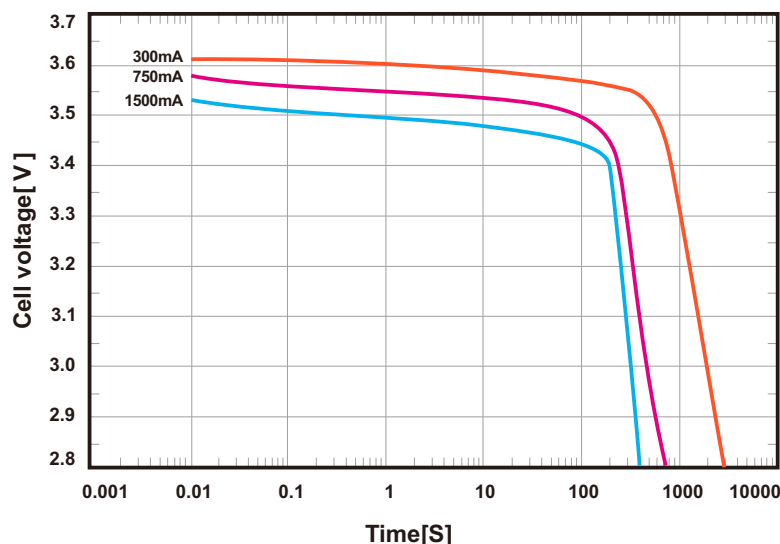

Temperature VS 1S Pulse Cutoff Voltage

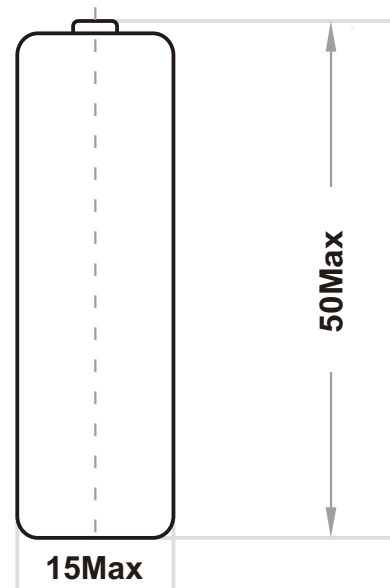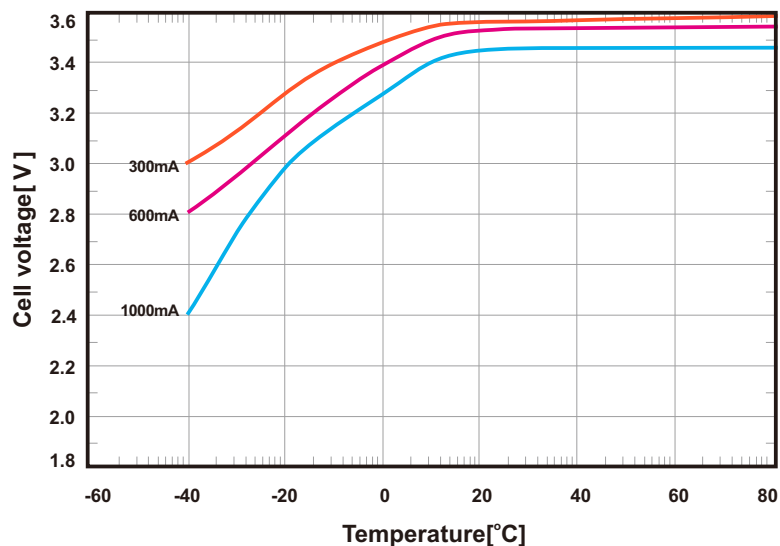

• Available Terminations

- S: Standard Termination
- T: Solder Tabs
- Customized terminations are available

• Warning

- Do not expose the battery to open flame, inflammable and explosive articles.
- Do not recharge, short-circuit, disassemble, incinerate the battery or heat the battery to more than 100°C.
- Do not use the battery beyond the permitted temperature range.

Wuhan Sunmoon Battery Co., Ltd.

Tel: +86-27-84732116 84730089

Add: No.231, Xingsan Road, Hannan District, Wuhan, Hubei Province, China

Post: 430090

Web: www.sunmoonbat.com

Email: info@sunmoonbat.com